

PRODUCT

CATALOGUE



DTF PRINTER PACKAGES

UV DTF

HEATPRESSES

FLATBED CUTTERS

Contents




DTF Printer Packages 01 - 03



DTF Shakers / Extractors 04 - 05



UV DTF Printers 06 - 08



3D Patch Printer 09



Flatbed Printer 10



Heat Presses 11



Cutting Solutions 12

DTF Printer 602 Package

The ZS602 is perfect for businesses who want to add DTF to their production. This completely configurable package is suitable for all users from complete beginners to DTF through to long standing printing industry professionals.

Two available configuration:

2 Head Standard

2 x i3200HD print head (H1- CMYK , H2- WWWW) 5 colours.

2 Head Premium:

1 x i3200HD + 1 x i1600 (H1- CMYK Lc LM R Lk + H2 - WWWW)
9 colours.

Printer Parameters

Model	ZS 602
Print Width	600mm
Print Accuracy	720 x 1800 / 720 x 2400 DPI
Rip Software	Print Factory
Operating System	Windows 10 /11
Printer Interface	Gigabit Ethernet Port
Work Environment	Temp 15 - 28°C Humidity 45% - 65%
Power Input	Standard 10 Amp Point
Net Weight	156Kg
Machine size	1630 x 750 x 1420 mm
Package Size	1460 x 710 x 1000 mm

Shaker Parameters

Model	ZH 600 -2
Heat Tunnel length	700mm
Heating Method	Heat Lamps
Number of Lamps	5
Power Input	20 Amp single phase (3 pin round)
Net Weight	295Kg
Machine size	1880 x 910 x 990 mm
Package Size	2100 x 1130 x 1130 mm
Specialty Features	Open lid pause, laser beam anti fire prevention system, intelligent powder control, auto temperature reduction feature.

*ZF 200 Smoke Purifier Included



Automatic cleaning of printing head




Film lacking sensor



Integrated lighting on the front guide plate



Auto white ink circulation stirring



Automatic cleaning of printing head



Film lacking sensor



Integrated lighting on the front guide plate



Auto white ink circulation stirring

DTF Printer 603 Package

Designed for businesses that demand superior colour reproduction and production flexibility, the RSP603 combines advanced 8-colour printing technology with industrial-grade reliability. Available in both Standard and Upgrade configurations, the ZS603 offers a scalable solution that can grow alongside your business.

Standard Package

ZS603 + ZH600-2 + ZF200

Ideal for businesses looking for a complete and reliable

Future-Ready Upgrade

ZS603 + ZH600-4 (refer page 9)+ ZF200

Future-proof your investment with a larger powder shaker, allowing an easy transition to the RSP604 without replacing your powder unit.

Printer Parameters

Model	ZS 603
Print Heads	3 x Epson i3200
Print Width	600mm
Print Accuracy	720 x 1800 / 720 x 2400 DPI
Rip Software	Print Factory
Operating System	Windows 10 /11
Printer Interface	Gigabit Ethernet Port
Work Environment	Temp 15 - 28°C Humidity 45% - 65%
Power Input	Standard 10 Amp Point
Net Weight	236Kg
Machine size	1860 x 940 x 1680 mm
Package Size	2100 x 960 x 710 mm

Shaker Parameters

Model	ZH 600 -2
Heat Tunnel length	700mm
Heating Method	Heat Lamps
Number of Lamps	5
Power Input	20 Amp single phase (3 pin round)
Net Weight	295Kg
Machine size	1880 x 910 x 990 mm
Package Size	2100 x 1130 x 1130 mm
Specialty Features	Open lid pause, laser beam anti fire prevention system, intelligent powder control, auto temperature reduction feature.

*ZF 200 Smoke Purifier Included (refer pg. 10)

DTF Printer 604 Package

Built for high-volume production, the RSP604 combines four Genuine Epson i3200 printheads with the industrial-grade ZH600-4 Powder Shaker to deliver outstanding print quality, colour accuracy, and production speeds of up to 24 linear metres per hour.

Designed for businesses printing over 200 metres per week, it provides the performance, reliability, and scalability needed for continuous production and future growth.


Printer Parameters

Model	ZS 604
Print Heads	4 x Epson i3200
Print Width	600mm
Print Accuracy	720 x 1800 / 720 x 2400 DPI
Rip Software	Print Factory
Operating System	Windows 10 /11
Printer Interface	Gigabit Ethernet Port
Work Environment	Temp 15 - 28°C Humidity 45% - 65%
Power Input	Standard 10 Amp Point
Net Weight	236Kg
Machine size	1860 x 940 x 1680 mm
Package Size	2100 x 960 x 710 mm

Shaker Parameters

Model	ZH 600 -4
Heat Tunnel length	1200mm
Heating Method	Heat Lamps
Number of Lamps	7
Power Input	32 Amp single phase (3 pin round)
Net Weight	225Kg
Machine size	2410 x 970 x 990 mm
Package Size	2100 x 1130 x 1130 mm
Specialty Features	Open lid pause, laser beam anti fire prevention system, intelligent powder control, auto temperature reduction feature.

*ZF 200 Smoke Purifier Included



Automatic Cleaning of printing head




Film lacking sensor



Integrated lighting on the front guide plate




Auto white ink circulation stirring



Open-lid pause function



Touch control screen



Heating tunnel fire protection function

Powder Shaker ZH 600-2/4

The ZH600-2 and ZH600-4 are fully automatic 600 mm powder shaker and curing unit, designed to deliver consistent, high-quality DTF production. With intelligent powder application, efficient drying, and user-friendly controls, it helps streamline your workflow while ensuring reliable print results.

The ZH600-2 is matched to 2 and 3 head DTF printers

The Zh600-4 is matched to 4 and 6 head DTF printers

Key Features

- Fully automatic powder application, baking and drying
- Intelligent hot air circulation for even curing
- User-friendly touchscreen control panel
- Low powder level alarm for uninterrupted production
- Designed for reliable, high-volume DTF production

Shaker Parameters

Model	ZH 600 -2	ZH 600 -4
Heat Tunnel length	700mm	1200mm
Heating Method	Heat Lamps	Heat Lamps
Number of Lamps	5	7
Power Input	20 Amp single phase (3 pin round)	32 Amp single phase (3 pin round)
Net Weight	295Kg	225Kg
Machine size	1880 x 910 x 990 mm	2410 x 970 x 990 mm
Package Size	2100 x 1130 x 1130 mm	2100 x 1130 x 1130 mm
Specialty Features	Open lid pause, laser beam anti fire prevention system, intelligent powder control, auto temperature reduction feature.	Open lid pause, laser beam anti fire prevention system, intelligent powder control, auto temperature reduction feature.

DTF Smoke Purifier 200

The ZF200 is a compact smoke purification system designed for DTF powder shakers. It effectively removes smoke and airborne particles during the curing process, helping create a cleaner, safer, and more comfortable production environment.

Key Features

- 10-Level Adjustable Air Volume Output
- Built-in Replaceable Filter Cartridge
- Built-in Replaceable Activated Carbon Pack
- Built-in Sound-Dampening Cotton
- Compact Design for Easy Integration
- Suitable for DTF Powder Shakers (2, 3,4 or 6 Head Models)



Smoke Extractor Parameters

Model	ZF 200
Air Output Volume	43-202 m ³ /h
Rated voltage	220V
Rated Power	Standard 10 amp plug
Machine Size	450 x 490 x 1050mm
Net Weight	49Kg
Package Size	660 x 540 x 1230, 72kg




10 Level adjustable air volume output



Built-in replaceable filter cartridge



Built-in replaceable activated carbon pack

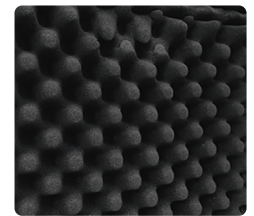

Built-in sound dampening cotton



UV DTF 301

Create stunning UV stickers right before your eyes with the compact yet powerful UV DTF 300 Using advanced UV curing technology, this printer produces vibrant, durable transfers that can be applied to a wide range of surfaces, including glass, plastic, metal, ceramics, leather, and more


The UV DTF 300 combines professional print quality, versatility, and ease of use, making it the ideal solution for customization businesses and print professionals.

Key features

- 300mm media width for efficient multi-design production
- High-definition i3200 print head for vibrant, detailed prints
- Compatible with a wide range of materials and surfaces
- Low running costs and minimal waste

Printer Parameters

Model	ZU 301
Heads	1 x Epson i3200 HD (8 channels) - WWCMYKVV
Print Width	300 mm
Print Accuracy	720 x 1800 / 720 x 2400 DPI
Rip Software	Print Factory
Operating System	Windows 10 / 11
Printer Interface	Gigabit Ethernet Port
Work Environment	Temp 15 - 28°C Humidity 45% - 65%
Power Input	Standard 10 Amp Point
Net Weight	143.5Kg
Machine size	1200 x 900 x 1120 mm
Package Size	1100 x 1060 x 72 mm



Automatic cleaning of printing head



Film shortage & taking-up sensor



Equipped with smell purifier



Auto white ink circulation stirring

UV DTF 601

Create stunning UV stickers on a larger scale with the powerful UV DTF 600. Designed for higher-volume production, this advanced UV printing system delivers vibrant, durable transfers that can be applied to a wide range of surfaces, including glass, plastic, metal, ceramics, leather, and more.


The UV DTF 600 combines industrial productivity, exceptional print quality, and versatile application capabilities, making it the ideal solution for businesses looking to scale their UV sticker production

Key features

- 600mm media width for efficient multi-design production
- High-definition i3200 print head for vibrant, detailed prints
- Compatible with a wide range of materials and surfaces
- Low running costs and minimal waste

Printer Parameters

Model	ZU 601
Heads	1 x Epson i3200 HD (8 channels) - WWCMYKVV
Print Width	600 mm
Print Accuracy	720 x 1800 / 720 x 2400 DPI
Rip Software	Print Factory
Operating System	Windows 10 / 11
Printer Interface	Gigabit Ethernet Port
Work Environment	Temp 15 - 28°C Humidity 45% - 65%
Power Input	Standard 10 Amp Point
Net Weight	158Kg
Machine size	1200 x 900 x 1120 mm
Package Size	1450 x 10560 x 72 mm



Automatic cleaning of printing head



Film shortage & taking-up sensor



Equipped with smell purifier



Auto white ink circulation stirring



UVDTF 603/4

Our full production 60cm UV DTF model produces vibrant, durable transfers that can be applied to a wide range of surfaces, including glass, plastic, metal, ceramics, leather, and more. A very robust machine with simple operation offers stability, speed and stunning print results. Available in a single or double sided colour print solution.

Key features

- 600mm media width for efficient multi-design production
- i3200 print heads offer vibrant, detailed prints
- Compatible with a wide range of materials and surfaces
- Low running costs and minimal waste

Printer Parameters

Model	UVDTF 603 / UVDTF 604
Print Heads	3 heads (single sided colour) 4 heads (Double sided colour)
Print Width	600 mm
Print Accuracy	720 x 1800 / 720 x 2400 DPI
Rip Software	Print Factory
Operating System	Windows 10 /11
Printer Interface	Gigabit Ethernet Port
Work Environment	Temp 15 - 28°C Humidity 45% - 65%
Power Input	2 x Standard 10 Amp Points
Net Weight	260Kg
Machine size	1855 x 800 x 1600 mm
Package Size	1450 x 10560 x 72 mm



10 Level adjustable air volume output



Built-in replaceable filter cartridge



Built-in replaceable activated carbon pack



Built-in sound dampening cotton

UV DTF PATCH 301


The ZU300 is a specialised 300 mm UV DTF printer designed for producing premium-quality UV DTF patches. Delivering vibrant colours, exceptional detail, and durable prints, it provides an efficient solution for businesses creating custom patches, apparel decorations, and branded products, combines versatility, premium finishes, and ease of production, making it the ideal solution for businesses looking to expand into high-value decorative applications.

Key Features


- 300 mm Print Width
- No B Film Required
- Intelligent White Ink Circulation
- Vacuum Suction Platform
- Ideal for UV DTF Patch Production

Printer Parameters

Model	ZU 301
Heads	1 x Epson i3200 HD (8 channels) - WWCMYKVV
Print Width	300 mm
Print Accuracy	720 x 1800 / 720 x 2400 DPI
Rip Software	Print Factory
Operating System	Windows 10 / 11
Printer Interface	Gigabit Ethernet Port
Work Environment	Temp 15 - 28°C Humidity 45% - 65%
Power Input	Standard 10 Amp Point
Net Weight	143.5Kg
Machine size	1200 x 900 x 1120 mm
Package Size	1100 x 1060 x 72 mm

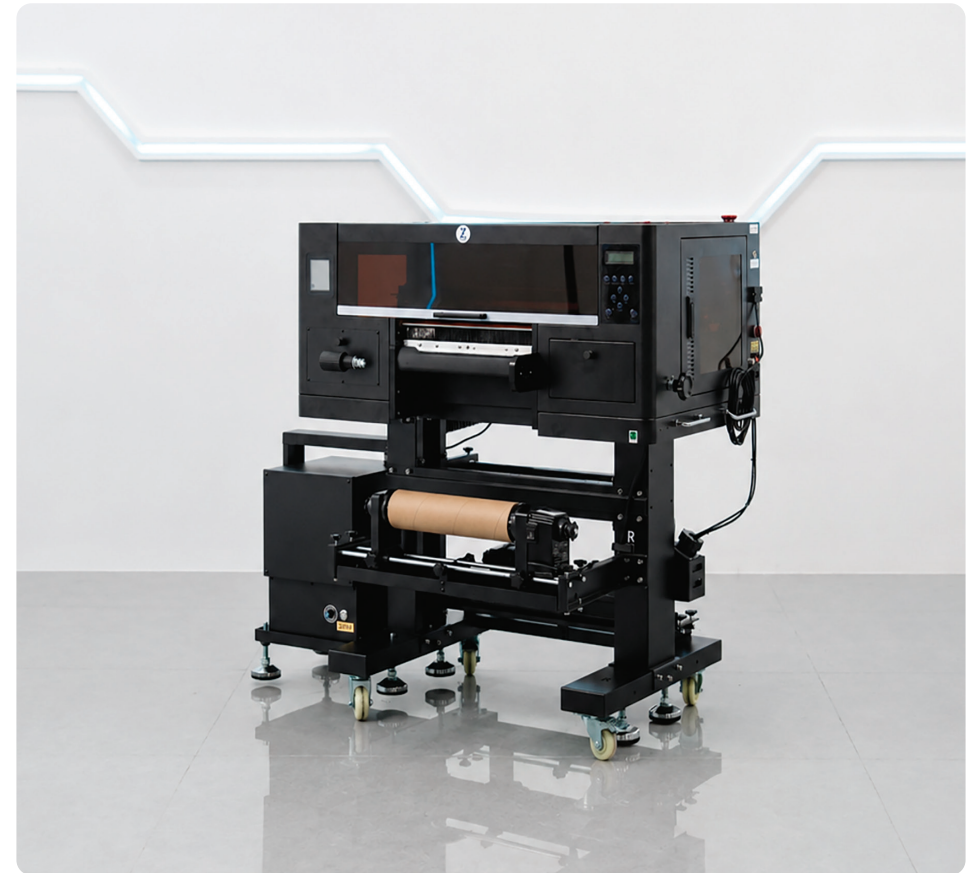

Single-drive film winder



Built in anti-static brush & lamination pressure roller



Waste ink collection bottle & full ink alarm



Auto white ink circulation stirring



DFX 9060 Flatbed


The 9060 flatbed printer is the perfect solution for those wishing to add versatility and convenience to their production offering. The flatbed allows you to print directly to any hard flat surface up to a height of 150mm in height. There are various head and colour configurations available as well as the optional UV DTF and bottle printing accessories.

Key features


- 900 x 600mm bed size
- i3200 print heads offer vibrant, detailed prints
- Compatible with a wide range of materials and surfaces
- Low running costs and minimal waste
- optional UV DTF and bottle printing attachment

Printer Parameters

Model	DXF9060
Print Heads	3 x i3200 / 4 x i3200
Inks	C,M,Y,K,LC,LM,R,O,W,V (different configurations available)
Curing	LED UV
Bed Size	900 x 600mm
Optional Accessories	UV DTF roll to roll attachment / Cylinder printing attachment
Print Accuracy	720 x 1500 / 720 x 1800 / 720 x 2400 DPI
Rip Software	Print Factory
Printer Interface	Gigabit Ethernet Port
Power Input	1 x single phase 20 amp plug (3 round pin plug)
Net Weight	390kg
Machine size	2000 x 1420 x 1045
Package Size	2140 x 1660 x 1160 mm

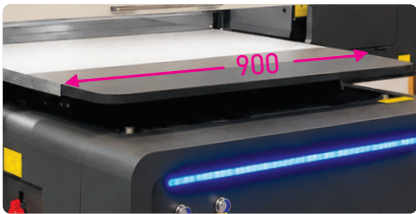

Convenient and faster 900mm print width

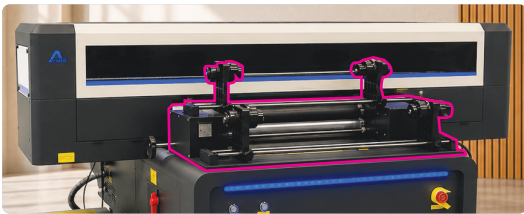

Optional 60cm roll to roll UV DTF attachment


MEM Heatpresses

High quality heatpresses are an essential part of the DTF process. The MEM heatpress range are built with quality parts and have a proven track record of reliability and excellent pressing utilising controlled air pressure delivered by a silenced compressor.

A range of extra accessories are available including castors, laser alignment and also a range of 8 interchangeable heat platen bases.


Heat Press Parameters

Model	TQ1-4050 single	TQ-4050 Double
Platten Size	40 x 50cm	40 x 50cm
Movement	Swing away	Manual sliding guide rail
Voltage	220V	220V
Power	Standard 15 amp plug	Standard 15 amp plug
Max Temp	260°C	260°C
Pressure Control	Pneumatic - air compressor	Pneumatic - air compressor
Air compressor	silenced - 40/50 Ltr	silenced - 40/50 Ltr
Base	Desktop model (no stand)	Stand with adjustable feet (castors available at extra cost)
Laser Guides	N/A	Optional Overhead Dual lasers
Extra Plattens	Interchangeable platens available	Interchangeable platens available
Size	770 x 420 x 540mm	1080 x 730 x 590mm
Weight	67KG	148KG

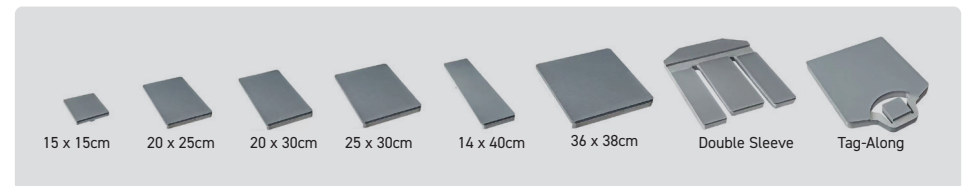



Dual cutting heads

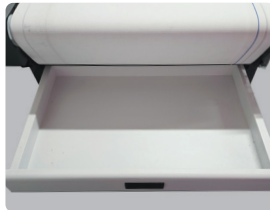

Convenient pull out catching tray



Simple to use control panel



Feed and clamp arrangement

DFX1070 Cutter Lite

Save production time with the DFX cutter Lite. The cutter will be integrated with print factory rip to totally automate your cutting process and production times.

This cutter is equipped with dual plotter style cutting blades and is designed to cut DTF and UVDTF film effectively. This “off the shelf” cutter and cannot be customised and is not designed to cut other materials outside DTF and UV DTF films.

The cut files are easily added to the cutter via USB transfer with a very simple user interface on the cutter control panel.

The cutter includes a conveyor belt, suction control, media clamping advancing, roll holder and feeder and a convenient catching basket / pull out tray at the front.

Cutter Parameters

Model	DXF1070 LITE
Print Width	600mm
Print Length	1000
Control Software	AOL Cut
Operating System	Windows 10 /11
Printer Interface	LCD Screen / USB flash drive transfer
Camera	CCD camera recognition
Suction	4 zone suction
Power Input	Standard 15 Amp Point - Single Phase
Net Weight	280Kg
Machine size	1700 x 1450 x 1250 mm
Package Size	1900 x 1690 x 1650 mm

DFX1070 Flat Bed Cutter Deluxe


Save production time with the DFX1070 Flat Bed cutter deluxe. The cutter will be integrated with print factory rip to totally automate your cutting process and production times.

This cutter is equipped with a high precision cutting head perfect for cutting DTF and UV DTF. Additionally this cutter can be customised by adding extra tool holders for other tasks should you have that requirement aswell as custom bed size.

The cutter includes a conveyor belt, suction control, media clamping advancing, roll holder and feeder and a convenient catching basket at the front.

Cutter Parameters

Model	DXF1070 DELUXE
Print Width	700mm
Print Length	1000
Control Software	AOL Cut
Operating System	Windows 10 /11
Printer Interface	Ethernet
Camera	CCD camera recognition
Suction	4 zone suction
Power Input	Standard 15 Amp Point - Single Phase
Net Weight	600Kg
Machine size	1700 x 1450 x 1250 mm
Package Size	1900 x 1690 x 1650 mm

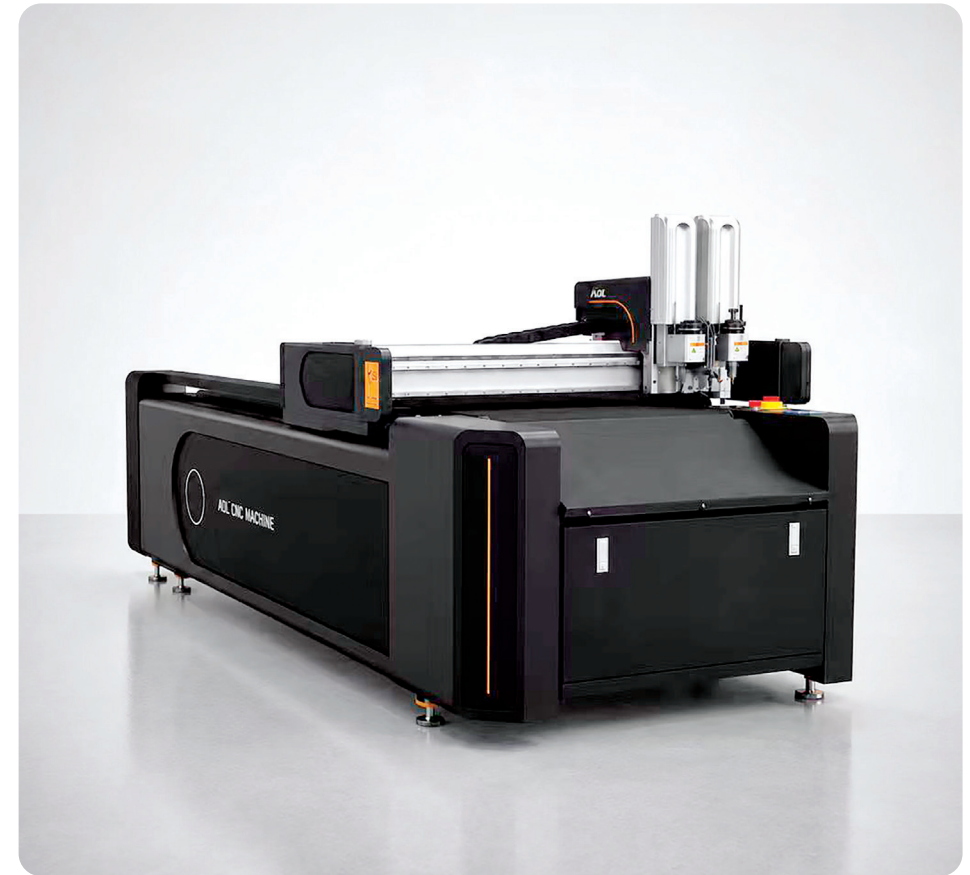


Roll feeder attachment



Standard drag knife tool



Drag knife blade



Automatic laser tool height device

ZL800 Laser Cutter


This high precision Roll feed laser cutter is capable of cutting a wide range of media with a high degree of accuracy.

Capable of cutting DTF film, UV DTF films, HTV vinyls, Leather, cardboard etc with an intelligent camera vision recognition system. Also featuring a red-dot visual position system which displays where the laser is located and travelling.


The cutting head features a vacuum accessory that is then filtered through an on board purifying filtration system reducing fumes and particles.

Laser Cutter Parameters

Model	ZL800
Print Width	800mm
Laser Type and Power	30W - CO2 laser
Control Software	RDWorksV8
Operating System	Windows 10 / 11
Printer Interface	Ethernet/USB
Camera	CCD camera recognition
Suction	Vacuum suction platform
Power Input	Standard 10 Amp Point - single phase
Net Weight	165Kg
Machine size	1300 x 775 x 1308 mm
Package Size	2000 x 1050 x 700 mm
Additional features	Vacuum suction platform, red-dot positioning, visual cutting via registration marks, lid-open pause sensor, Wi-fi connectivity, smell purifier system, touchscreen control panel




Roll feeder attachment



Standard drag knife tool



Drag knife blade



Automatic laser tool height device

DIGITAL FX MACHINERY

1/22 KINGSBURY STREET BRENDAL 4500 BRISBANE QUEENSLAND AUSTRALIA
WWW.DIGITALFXMACHINERY.COM.AU
PHONE: 07 2106 9926